

<section-header>

AEG POWERTOOLS promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

AEG HISTORY

Since being founded, AEG POWERTOOLS has been leading the way in new product development. By introducing the first transportable drilling machines in 1898, portable powertools were born. Over 100 years later AEG are still offering the professional user innovative, powerful solutions...

PROUD PAST... EXCITING FUTURE...





Keyless Safety Guard

the use of a tool.

2-Speed Gear

suit application.

Drill Only

Soft Hammer Mode

1-2 2 speed gearbox, for optimum speed to

Single mode - rotary drilling.

Drill And Hammer Drill

Chisel And Hammer Drill

demolition function

Combi Hammer

2 mode - rotary and rotary hammer drilling.

2 mode - rotary hammer drill with chipping/

3 mode - rotary and rotary hammer drilling

with chiselling/demolition function.

Chiseling/demolition machine.

Safety guard adjustment without

Reduces blow energy for increased control.

X

6

T

SOFT

ANNE

-

T


-7


***T

Chisel Drill

FEATURES KEY























Diamond Drill designed for maximum performance when used with diamond accessories.







Bevel Capacity Maximum bevel angle right and left.

AEG





CATALOGUE CONTENTS

CORDLESS SYST

18V POWER 14.4V POWER 12V POWER 3.6V POWER **BATTERIES & CHA**

HAMMER SYSTE

24V CORDLESS H **ROTARY HAMMER COMBI HAMMERS** CHIPPING HAMME LARGE DEMOLITI

DRILLING SYSTE PERCUSSION DRI DIAMOND DRILLS WALL CHASERS **SCREWDRIVERS**

METALWORKING

SMALL ANGLE GF LARGE ANGLE GR **DIE GRINDERS ABRASIVE CHOPS**

WOODWORKING

JIGSAWS **CIRCULAR SAWS** MITRE SAW MITRE SAW LEGS RECIPROCATING RANDOM ORBIT **DUST EXTRACTIO** HEAT GUNS

ACCESSORIES ACCESSORY SETS



1-

Pendulum Action For a faster, more aggressive cut.



Heavy duty kitbox.



Crosscut Capacity Maximum crosscut capacity of saw.







Mitre Capacity Maximum mitre angle right

For heavy duty screwdriving applications. 1/4" HEX 1/4"

Impact Driver





POWERTOOLS

EMS	06
	08 – 16
	16 – 17
	18 – 22
	19 – 19
ARGERS	24 – 25
MS	26
AMMER	28 – 28
S	28 – 28
;	29 – 34
RS	32 – 33
ON HAMMERS	34 – 34
MS	36
LLS	38 – 41
i de la companya de l	42 – 42
	42 – 42
	43 – 43
	44
INDERS	46 – 49
INDERS	50 – 52
	53 – 53
AW	55 – 55
	56
	58 – 59
	60 - 60
TAND	61 – 61
TAND	61 – 61
SAWS	62 - 62
BELT SANDERS	63 – 64 65 – 65
N	65 – 65 66 – 66
	00 - 00
	67
3	68 – 69
	00 - 09

TOTAL TOTAL ESS DORDLESS

THE CORDLESS SYSTEM

AEG POWERTOOLS offer today's professional end user a wide range of innovative, powerful cordless solutions that are capable of performing in the toughest conditions.

No.

AEG

RANGE INCLUDES

	18V POWER
	14.4V POWER
ľ	12V POWER
l	3.6V POWER
	BATTERIES & CHARGERS





18V POWER RANGE

BMS 18C Li



BSB 18 Li

The new 18 volt heavy duty cordless range from AEG Powertools offers innovative, powerful solutions for today's professional user







BIIS 18 L

BST 18X Li

BATTERY SYSTEMS

BKS 18 Li



- Superior power to weight ratio
- No memory effect
- Minimal self discharge
- Extended battery life more charge cycles
- 18v NiCd and NiMH versions also available

18V HEAVY DUTY HAMMERDRILL/DRIVER



LED Well positioned LED illuminates workplace without obstruction

Features

- Compact & powerful for high torque applications
- 64 Nm maximum torque delivers complete power
- 2-speeds 0-450 rpm/0-1600 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock
- LED for work place illumination
- 3 mode selector Ease of use between applications
- Powerful fade free lithium-ion 18 volt power pack

ard Equipment – 2 x batteries, charger, side handle and kitbox

Cat No. BSB 18 Li Article No. 4935 4112 80 Version. 2 x 3Ah Li-ion batteries, 30 min charger EAN No. 4002395196708 Cat No. BSB 18 NiCd Article No. 4935 4112 90 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395196722

Model: BSB 18 Li

ALSO AVAILABLE: NiCd Version

CLUTCH

LITHIUM ION 200

24 Stage torque adjustment for complete control.

SELECTOR SWITCH

3 Mode selector switch for fast, easy mode changes between applications.

JAM POT DESIGN

Rugged jam pot design adds to durability of tool

RUBBER GRIP

Ergonomic soft-grip for added comfort

Specification	
No. of batteries	2 x 3Ah
Charger	30 min
Weight	2.6 kg
Drilling wood/metal/masonry	38/13/16 mm
Chuck	13 mm
Max torque	64 Nm
No load speed	0-450/0-1600 rpm
Voltage	18 V



18V ULTRA COMPACT DRILL/DRIVER

Features

- Small, compact & powerful for high torque applications
- 51 Nm maximum torque delivers complete power
- 2-speeds 0-450 rpm/0-1650 rpm
- Integrated clutch and chuck for a more compact design
- LED for work place illumination
- Forward and reverse
- Powerful fade free lithium-ion 18 volt power pack

Specification

No. of batteries	2 x 3Ah
Charger	30 min
Weight	2.2 kg
Drilling metal/wood	13/36mm
Chuck	13mm
Max torque	52 Nm
No load speed	0-450/0-1650 rpm
Voltage	18 V

Cat No. BS 18C Li Article No. 4935 4113 20 Version. 2 x 3Ah Li-ion batteries, 30 min charger EAN No. 4002395196777 Cat No. BS 18C NiCd Article No. 4935 4113 30 Version, 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395196791 Cat No. BS 18C 0 Article No. 4935 4113 40 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395196814



52 Mm

2.2kg

* Charge times based on 2Ah NiCd Battery

POWER & PERFORMANCE

Model: BS 18C Li

ALSO AVAILABLE: NiCd Version & Zero Version

VM ION THIUM ION NEW enver





Features

- · Compact, well balanced impact driver
- Long stack motor for extra durability
- 155 Nm maximum torque Industrial magnesium gearbox for extended life
- Delivers up to 3100 impacts per minute for increased productivity
- ¼" Hex bit reception
- Built in LED illuminates work surface
- Powerful fade free lithium-ion 18 volt power pack

Specification

No. of batteries - 2 x 3Ah Charger - 30 min Weight - 2.1 kg Max torque - 155 Nm

No load speed - 0-2400 rpm Impact rate - 0-3100 bpm Tool reception - 1/4" Hex Bit Voltage - 18 V

standard Equipment – 1 screwdriver bit, 2 x batteries, charge

Cat No. BSS 18 Li Article No. 4935 4113 50 Version. 2 x 3Ah Li Ion batteries, 30 min charger EAN No. 4002395196821 Cat No. BSS 18 NiCd Article No. 4935 4113 60 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395196845 Cat No. BSS 18 0 Article No. 4935 4113 70 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395196869

18V ULTRA COMPACT IMPACT DRIVER

Features

- · Ultra compact, well balanced impact driver
- Superior ergonomics
- 155 Nm maximum torque
- Delivers up to 3100 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life • ¼" Hex bit reception
- Built in LED illuminates work surface
- Powerful fade free lithium-ion 18 volt power pack

Specification

No. of batteries - 2 x 3Ah Charger - 30 min Weight - 1.8 kg Max torque - 155 Nm No load speed - 0-2400 rpm Impact rate - 0-3100 bpm Tool reception - 1/4" Hex Bit Voltage - 18 V

ndard Equipment – 1 screwdriver bit, 2 x batteries, charger

Cat No. BSS 18C Li Article No. 4935 4116 40 Version. 2 x 3Ah Li-ion batteries, 30 min charger EAN No. 4002395130931 Cat No. BSS 18C NiCd Article No. 4935 4116 50 Version. 2 x 2Ah NiCd Batteries, 60 min charger EAN No. 4002395130948 Cat No. BSS 18C 0 Article No. 4935 4113 40 Version. Zero version - no batteries. charger or kitbox EAN No. 4002395199814



Model: BSS 18 Li

ALSO AVAILABLE: NiCd Version & Zero Version





Model: BSS 18C Li

ALSO AVAILABLE: NICd Version & Zero Version





Features

- Innovative design for confined spaces
- Operational with one hand due to compact design
- 3500 strokes per minute and 13 mm stroke length for fast cutting applications
- FIXTEC for fast and easy keyless blade change
- Built-in LED
- 2 Finger variable speed trigger
- Powerful fade free Lithium-ion 18 volt power pack

Standard Equipment – 3 x blades, 1 x battery, charger and kitbox

Cat No. BMS 18C Li Article No. 4935 4114 20 Version. 1 x 3Ah Li-ion batteries, 30 min charger EAN No. 4002395196951 Cat No. BMS 18C 0 Article No. 4935 4114 30 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395196975

Specification	
No. of batteries	1 x 3Ah
Charger	30 min
Weight	2.2 kg
Stroke length	13 mm
Strokes per minute	0-3500 spm
Voltage	18 V



18V PENDULUM ACTION RECIPROCATING SAW



Features

- Pendulum action for increased performance
- 3300 strokes per minute and 19mm stroke length for fast cutting applications
- FIXTEC for fast and easy keyless blade change
- Adjustable shoe
- Saw blade can be turned 180° for various applications
- Variable speed trigger
- Soft-grip
- Powerful fade free Lithium-ion 18 Volt power pack

Standard Equipment - 2 x blades, 1 x battery, charger and kitbox

Cat No. BUS 18 Li Article No. 4935 4114 00 Version. 2 x 3Ah Li-ion batteries, 30 min charger EAN No. 4002395196913 Cat No. BUS 18 NiCd Article No. 4935 4114 10 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395196937 Cat No. BUS 18 0 Article No. 4935 4114 60 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395197019



Model: BUS 18 Li

ALSO AVAILABLE: Zero Version

Specification

POWER & PERFORMANCE

No. of batteries	2 x 3Ah
Charger	30 min
Weight	3.5 kg
Stroke length	19 mm
Strokes per minute	0-3300 spm
Voltage	18 V



* Charge times based on 2Ah NiCd Battery

18V HEAVY DUTY JIGSAW

Features

- Pendulum action for increased cutting performance
- Metal gearbox for extended durability
- Professional, die-cast aluminium base plate
- Patented FIXTEC system for fast keyless blade change
- Variable speed trigger
- Ergonomic soft-grip for comfortable use
 Electronic motor brake
- Electronic motor bra
- Powerful fade free lithium-ion 18 Volt power pack

Specification

No. of batteries - 2 x 3Ah Charger - 30 min Weight - 3.5 kg Stroke - 25 mm No load stroke rate - 0 - 2050 spm Bevel cutting angle - to 45° Cutting depth in soft wood - 80 mm Voltage - 18 V

Standard Equipment – 2 x batteries, charger, plastic shoe cover, anti splintering device, 2 x blades and kitbox

Cat No. BST 18X Li Article No. 4935 4131 45 Version. 2 x 3Ah Li-ion batteries, 30 min charger EAN No. 4002395197484 Cat No. BST 18X NiCd Article No. 4935 4131 35 Version. 2x2Ah NiCd batteries, 60 min charger EAN No. 4002395197477 Cat No. BST 18 0 Article No. 4935 4131 30 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395197460



Model: BST 18X Li

ALSO AVAILABLE: NiCd Version & Zero Version



LITHIUM ION

Model: BHO 18 Li

18V CORDLESS PLANER

Features

- Additional front handle with soft-grip for convenient two hand working
- Large dust bag for a dust free working area
- Adjustment switch for easy adjustment of cutting depth
- Front and rear shoe have a v-groove for easy chamfer cutting
- Automatic kickstand to protect surfaces from accidental planer contact
 Lock off switch for safety
- Ergonomic handle design with large soft-grip area for maximum comfort
- Die-cast base for high durability

Specification

Width - 82 mm Rebate depth - 0 - 12.5 mm Cutting depth - 0 - 1.6 mm Weight - 3.1 kg No load speed - 11,000 rpm Voltage - 18 V

Standard Equipment – side fence, dust extraction, parallel guide, spanner. 2 spare blades

Cat No. BH0 18 Li Article No. 4935 4131 80 Version. 2 x 3Ah Li-ion batteries, 60 min charger EAN No. 4002395197569 Cat No. BH0 18 NiCd Article No. 4935 4131 85 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395197576 Cat No. BH0 18 0 Article No. 4935 4131 75 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395197552







18V HEAVY DUTY CIRCULAR SAW

Features

- Compact, light and well balanced
- Magnesium die cast base for durability
- 165 mm blade on the right hand side for excellent visibility of cutting line
- Large 50° bevel capacity
- Electronic motor brake, saw blade stops within seconds
- Dust chute can be rotated for best dust ejection
- Lock off switch for safety
- Spindle lock for fast blade changing
- Powerful fade free lithium-ion 18 Volt power pack

Specification


No. of batteries	2 x 3Ah
Charger	30 min
Weight	3.6 kg
Saw blade Ø	165 mm
Arbor Ø	15.87mm (5/8")
Bevel capacity	50°
No load speed	4400 rpm
Cutting depth at 45°	0 – 41 mm
Cutting depth at 90°	0 – 54 mm
Voltage	18 V

Standard Equipment – 2 x batteries, charger, 165 mm TCT blade, side fence and kitbox

20

Cat No. BKS 18 Li Article No. 4935 4113 80 Version. 2 x 3Ah Li-ion batteries, 30 min charger EAN No. 4002395196876 Cat No. BKS 18 NiCd Article No. 4935 4113 90 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395196890 Cat No. BKS 18 0 Article No. 4935 4115 20 Version. Zero Version EAN No. 4002395197101



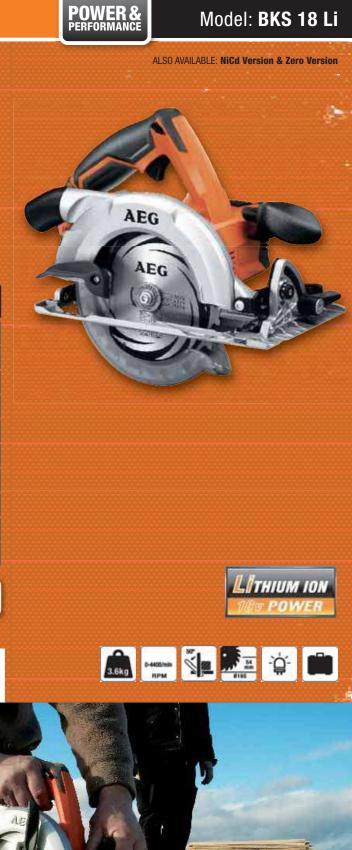

* Charge times based on 2Ah NiCd Battery

CONTRACTOR PACK – 18V 5 PIECE COMBO

Model: JP 18 A5



CONTRACTOR PACK – 14.4V 3 PIECE HEAVY DUTY COMBO

Model: JP 14

AEG

Contains

- BS 14 Drill driver
- BSS 14 Impact driver
- FL 14 Flashlight



ndard Equipment – 2x batteries, charger, contractor bag

Cat No. JP 14 A Article No. 4935 4135 95 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395192670 Cat No. JP 14 B Article No. 4935 4136 00 Version. 2 x 3Ah Li-ion batteries, 30 min charger EAN No. 4002395192687



14.4V HAMMERDRILL/DRIVER

Features

- Hammerdrill mode for drilling masonry and stone
- 63 Nm maximum torque delivers complete power
- 22-Stage torque adjustment
- Electronic switch with variable speed
- 2-Speed gearbox
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock

t – 2 x batteries, charg le handle and kithox

LITHIUM ION

Charger - 30 min Weight - 1.8 kg

Chuck 1.5-13 mm

Voltage - 14.4 V

Max torque - 40 Nm

Charger - 30 min

Weight - 2.6 kg

Chuck 1.5-13 mm

Voltage - 14.4 V

Max torque - 63 Nm

Cat No. BSB 14 STX Li Article No. 4935 4130 90 Version. 2 x 3Ah Li Ion batteries, 30 min charger EAN No. 4002395197392 Cat No. BSB 14 STX NiCd Article No. 4935 4130 80 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395197385 Cat No. BSB 14 STX 0. Article No. 4935 4130 85 Version. Zero version - no batteries, charger or kithox, FAN No. 4002395197378

14.4V DRILL/DRIVER

Features

- Compact & powerful 14v drill driver 40Nm maximum torque delivers complete
- power
- 23-stage torque adjustment for complete
- control
- Electronic switch with variable speed
- 2-speed gearbox • FIXTEC 13 mm full metal Rohm keyless chuck,
- with spindle lock

ndard Equipment – 2 x batteries, charger,

Cat No. BS 14X Li Article No. 4935 4130 65 Version. 2 x 3Ah Li-ion batteries. 30 min charger EAN No. 4002395197347 Cat No. BS 14X NiCd Article No. 4935 4130 50 Version. 2 x 1.5Ah NiCd batteries, 30 min charger EAN No. 4002395197316 Cat No. BS 14X NiCd Article No. 4935 4130 55 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395197330 Cat No. BS 14X NiMh Article No. 4935 4130 75 Version. 2 x 3Ah NiMh batteries, 30 min charger EAN No. 4002395197354 Cat No. BS 14X 0 Article No. 4935 4130 60 Version. Zero version - no batteries, charoer or kitbox EAN No. 4002395197323

14.4V COMPACT IMPACT DRIVER

Features

- Compact, well balanced impact driver
- Industrial magnesium gearbox and
- Delivers 3300 impacts per minute
- for increased productivity
- 85 Nm maximum torque
- ¼" Hex bit reception
- Built in LED illuminates work surface
- Powerful fade free lithium-ion 14.4 volt power pack

tandard Equipment – 2 x batteries, charc e handle and kitbox



Cat No. BSS 14 Li Article No. 4935 4131 16 Version. 2 x 3Ah Li-ion batteries. 30 min charger EAN No. 4002395197415 Cat No. BSS14 NiCd Article No. 4935 4131 06 Version. 2 x 2Ah NiCd batteries. 60 min charger EAN No. 4002395197446 Cat No. BSS 14 0 Article No. 4935 4131 20 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395197439

gears for extended life

Specification

Charger - 30 min

Weight - 2.1 kg

Max torque - 85 Nm

Voltage - 14.4 V

Model: BSB 14 STX Li



Model: BS 14X Li





* Charge times based on 2Ah NiCd Battery

12V HAMMERDRILL/DRIVER

Model: BSB 12 NiCd

Features

- Hammerdrill mode for drilling masonry and stone
- 57 Nm maximum torque delivers complete power • 22-Stage torgue adjustment
- Electronic switch with variable speed
- 2-Speed gearbox
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock

Specification

No. of batteries - 2 x 2Ah Charger - 60 min Weight - 2.8 kg Drilling metal/wood/masonry · 13/34/13 mm

Chuck 1.5 -13 mm Max torque - 57 Nm No load speed - 0-400/0-1550 rpm Voltage - 12 V

ndard Equipment – 2 x batteries, char le h<u>andle and kitbox</u>

Cat No. BSB 12 NiCd Article No. 4935 4130 15 Version. 2 x 2Ah NiCd batteries. 60 min charger EAN No. 4002395197255





Model: BS 12X NiCd

12V DRILL/DRIVER

Features

- Compact & powerful 12v drill driver
- 35 Nm maximum torque delivers complete power
- 23-stage torque adjustment for complete control
- Electronic switch with variable speed
- 2-speed gearbox
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock

Specification

No. of batteries - 2 x 1.5Ah Charger - 60 min Weight - 2 kg Drilling metal/wood - 10/30 mm Chuck 1-10 mm Max torque - 35 Nm No load speed - 0-380/0-1300 rpm Voltage - 12 V

Cat No. BS 12X NiCd Article No. 4935 4130 00 Version. 2 x 1.5Ah Nicd batteries, 60 min charger EAN No. 4002395197217 Cat No. BS 12X NiCd Article No. 4935 4130 05 Version. 2 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395197231 Cat No. BS 12X NiMh Article No. 4935 4136 40 Version. 2 x 3Ah NiMh batteries, 30 min charger EAN No. 4002395192960 Cat No. BS 12X 0 Article No. 4935 4130 24 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395198283





RIGHT ANGLED IMPACT DRIVER

Features

- Compact right-angled head ideal for fastening in tight spaces
- 80 Nm torque
- Industrial metal gearbox and gears for superior durability
- 1/4" Hex bit reception
- Variable speed paddle switch
- Mar resistant head cover helps protect work-piece from accidental damage

Specification

No. of batteries - 1 x 2Ah Charger - 60 min Weight - 2.3 kg Chuck - 1/4" Hex

Max torque - 80 Nm No load speed - 0-2200 rpm Voltage - 12 V

tandard Equipment – 1 x 2Ah battery, char

Cat No. BSS 12 RW NiCd Article No. 4935 1117 10 Version. 1 x 2Ah NiCd batteries, 60 min charger EAN No. 4002395131600 Cat No. BSS 12 RW 0 Article No. 4935 4117 30 Version. Zero version - no batteries. charger or kitbox EAN No. 4002395137619

3.6V INLINE SCREWDRIVER

Features

- In-line or angled handle adjustment
- 10-Stage torque selection plus drill stage
- Ergonomic, modern design
- 2-Speed full metal gearbox
- ¼" Hex bit reception

Specification

No. of batteries - 2 x 1.5Ah Charger - 30 min No load speed - 200/600 rpm Weight with battery - 0.6 kg Length with battery - 28 cm

Drilling aluminium/ wood - 5/6 mm Max torque - 6.5 Nm Voltage - 3.6 V

ard Equipment – 2 x 1.5Ah batteries, charge




Cat No. SE 3.6 Li Article No. 4935 4131 65 Version. 2 x 1.5Ah Li-ion batteries, 30 min charger EAN No. 4002395197538 Cat No. SE 3.6 NiCd Article No. 4935 4131 55 Version. 2 x 1.4Ah NiCd batteries, 30 min charger EAN No. 4002395197514 Cat No. SE 3.6 NiMh Article No. 4935 4131 60 Version. 2 x 2Ah NiMh batteries, 30 min charger EAN No. 4002395197521

Model: BSS 12 RW NiCd



Model: SE 3.6 Li

* Charge times based on 2Ah NiCd Battery

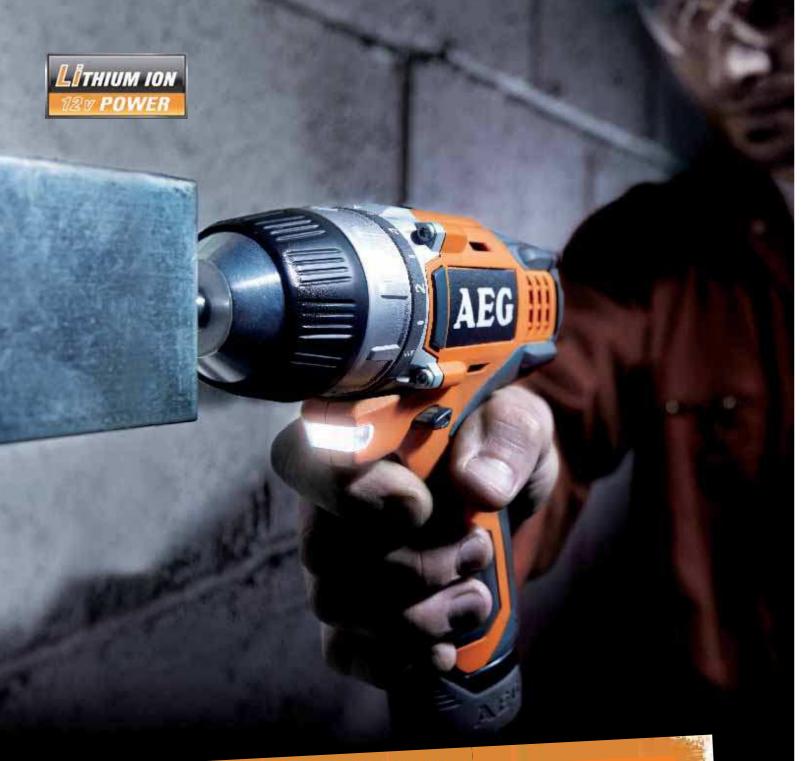

COMPACT WER

The compact screwdriving and impact driving range from AEG POWERTOOLS offers a line of compact, ergonomically superior tools that let you do more with less! These products harness our advances in motor technology, high-strength lightweight materials, and compact design to combine big performance with small size and weight, meaning they're easier to fit into tight spaces, use for long periods, carry and store.

12V 2 SPEED ULTRA COMPACT DRILL/DRIVER

Features

- Compact pocket drill/screwdriver measuring only 160mm
- 17 stage torque adjustment plus additional drilling stage
- 2 speed gearbox for wide range of applications
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surface

Specification	
No. of batteries	2 x 1.5Ah
Charger	30 min
Weight	1.1 kg
Drilling steel/soft wood	10/20 mm
Chuck	10 mm
Max torque	25 Nm
No load speed	0-300/0-1200 rpm
Voltage	12 V

ard Equipment – 2 x batteries, charger and kitbox

Cat No. BS 12C Li Article No. 4935 4115 30 Version. 2 x 1.5Ah Li-ion batteries, 30 min charger EAN No. 4002395197132







Model: BS 12C2 Li







Charge times based on 2Ah NiCd Battery

12V ULTRA COMPACT DRILL/DRIVER

Features

- Compact pocket drill/screwdriver measuring only 160mm
- 17 stage torque adjustment plus additional drilling stage
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surfaces

Specification

No. of batteries - 2 x 1.5Ah Charger - 30 min Weight - 1.1 kg Drilling steel/soft wood - 10/20 mm Chuck - 10 mm Max torque - 22.6Nm No load speed - 0-1200 rpm Voltage - 12 V

Standard Equipment – 2 x batteries, charger and kitbox

Cat No. BS 12C Li Article No. 4935 4130 40 Version. 2 x 1.5Ah Li-ion batteries, 30 min charger EAN No. 4002395197279

12V ULTRA COMPACT DRILL/DRIVER

Features

- Ultra compact impact driver
- 113 Nm torque
- Industrial metal gearbox and gears for superior durability
- ¼" Hex bit reception
- Ergonomic soft-grip design
- Built in LED illuminates the work surface

Specification

No. of batteries - 2 x 1.5Ah Charger - 30 min Weight - 1.2 kg Max torque - 113 Nm No load speed - 0-1800 rpm Impact rate - 0-2400 lpm Tool reception - 1/4" Hex Voltage - 12 V

Standard Equipment – 2 x batteries, charger and kitbox

Cat No. BSS 12C Li Article No. 4935 4116 80 Version. 2 x 1.5AH Li lon batteries, 30 min charger EAN No. 4002395130979 Cat No. BSS 12C 0 Article No. 4935 4117 00 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395130993



COMPACT POWER

1.1kg

COMPACT POWER Model: BS 12C Li

AEG

LITHIUM ION

NEW

È

Model: BSS 12C Li





Ecatures Sum and the second part of the second part

MINI RADIO

18V FLUORESCENT LIGHT

Features

- Fluorescent Light
- 360° Illumination
- Incorporated hook to hang light

Specification

No. of batteries - 0 Weight - 0.6 kg Voltage - 18 V

NEW

Standard Equipment – Fluorescent bulb

Model: BR 18C





Model: BFL 18





BATTERIES

	CATALOGUE NUMBER	CHEMISTRY	CAPACITY
	L1830R	Li Ion	3.0
1 8 <	L1815R	Li Ion	1.5
	B1820R	NiCd	2.0
	L1430R	Li Ion	3.0
4 <	M1430R	NiMH	3.0
14.	B1415R	NiCd	1.5
	B1420R	NiCd	2.0
	L1215R	Li Ion	1.5
>	M1230R	NiMH	3.0
12 <	B1220R	NiCd	2.0
	B1215R	NiCd	1.5
	SL 3.6	Li lon	1.5
3.6 V	SM 3.6	NiMH	2.0
	SB 3.6	NiCd	1.4

CHARGERS

CATALOGUE NUMBER	CHEMISTRY	
AL 9618	NiCd, NiMH, <i>Li Ion</i> 9.6 - 18 V	
BL 9618	NiCd, NiMH, <i>Li Ion</i> 9.6 - 18 V	
LL 1230	<i>Li Ion</i> 12 V	
LA 036	NiCd, NiMH, <i>Li Ion</i> 3.6 V	

*charge time based upon 2Ah NiCd batteries

BATTERIES BAARGERS

Ć

Max HC

Long-life, high capacity packs without any memory effect. The excellent contact system with perfectly protected self cleaning contacts offers the lowest possible resistance between battery and tool for optimum performance.

The ultimate battery technology...smaller and lighter than NiCd and NiMH, this technology also has minimal self discharge.

THIUM ION



POWE

CHARGER COMPATIBILITY/ CHARGE TIME*	ARTICLE NUMBER	EAN NUMBER
	4932 3521 14	4002395367672
	4932 3521 60	4002395368196
	4932 3521 12	4002395367658
AL9618 / 60 mins BL9618 / 30 mins	4932 3521 11	4002395367641
	4932 3521 10	4002395367634
	4932 3521 08	4002395367610
	4932 3521 09	4002395367627
LL1230 / 30 mins	4932 3520 95	4002395367481
	4932 3521 07	4002395367603
AL9618 / 60 mins BL9618 / 30 mins	4932 3521 06	4002395367597
	4932 3521 05	4002395367580
	4932 3520 99	4002395367528
LA 036 / 30 mins	4932 3521 69	4002395368228
	4932 3520 98	4002395367511

CHARGE TIME*	ARTICLE NUMBER	EAN NUMBER
60 mins	4932352104	4002395367573
30 mins	4932352103	4002395367566
30 mins	4932352096	4002395367498
30 mins	4932352097	4002395367504



REAL HAMMER DOWER

durability and designed for optimised comfort and ease of use. Innovative AEG patented solutions such as FIXTEC, AVS (Anti-Vibration System), Softgrip and advanced electronics guarantee the best professional results.

24V CORDLESS HAMMER

Model: BBH 24 NiMH

ALSO AVAILABLE: NiCd version

rd Equipment – 2 x batteries, r, front handle, depth gauge and

2.4kg

W

Features

- L-shape SDS hammer ideal for drilling and fixing into concrete up to 26mm
- 3.2J impact energy delivers high performance
- Rotary-stop for light chiselling applications
- · Impact stop mode for rotary drilling only in wood, steel and tiles
- Electro-pneumatic hammer mechanism
- Metal gearbox for extended durability
- Safety clutch for user protection

Specification

No. of batteries - 2 x 3Ah Charger - 30 min Weight - 4.5 kg Drilling capacity in steel/concrete/wood - 13/26/30 mm

Hammer rate (full load) - 0-4400 bpm Impact energy - 3.2 J No load speed - 0-1400 rpm Voltage - 24 V

Cat No. BBH24 NiMH Article No. 4935 4121 20 Version. 2 x 3Ah NiMH batteries, 30 min charger EAN No. 4002395198252 Cat No. BBH24 NiCd Article No. 4935 4120 87 Version. 2 x 2Ah NiCd batteries. 60 min charger EAN No. 4002395198207

SDS-PLUS ROTARY HAMMER

Features

- Powerful 650 watt motor
- 22 mm drilling capacity in concrete
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal, forward and reverse mechanism

Specification

Power input - 650 watt Power output - 325 watt No load speed - 0-1290 rpm Blow energy - 2.5 J Tool reception - SDS-Plus

Hammer rate (full load) - 0-3700bpm Drilling concrete/steel/wood - 22/13/30mm Weight - 2.5 kg

Cat No. BH 22 E Article No. 4935 4114 80 Version. 220-240V EAN No. 4002395197026



ST PT

SDS

PLUS

3.2

SDS-PLUS ROTARY HAMMER

Features

- Powerful 720 watt motor
- 24 mm drilling capacity in concrete
- Safety clutch for user protection Variable speed electronics for control
- · Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort

Specification

Power input - 720 watt Power output - 360 watt No load speed - 1500 rpm Impact energy - 2.7 J


Hammer rate (full load) - 0-4500 bpm Drilling concrete/ steel/wood - 24/13/30 mm Weight - 2.4 kg





SDS-PLUS COMBI HAMMER

Power input	720 watt
Power output	360 watt
No load speed	1500 rpm
Impact energy	2.7 J
Hammer rate (full load)	0-4500 bpm
Drilling concrete/steel/wood	24/13/30 mm
Weight	2.6 kg

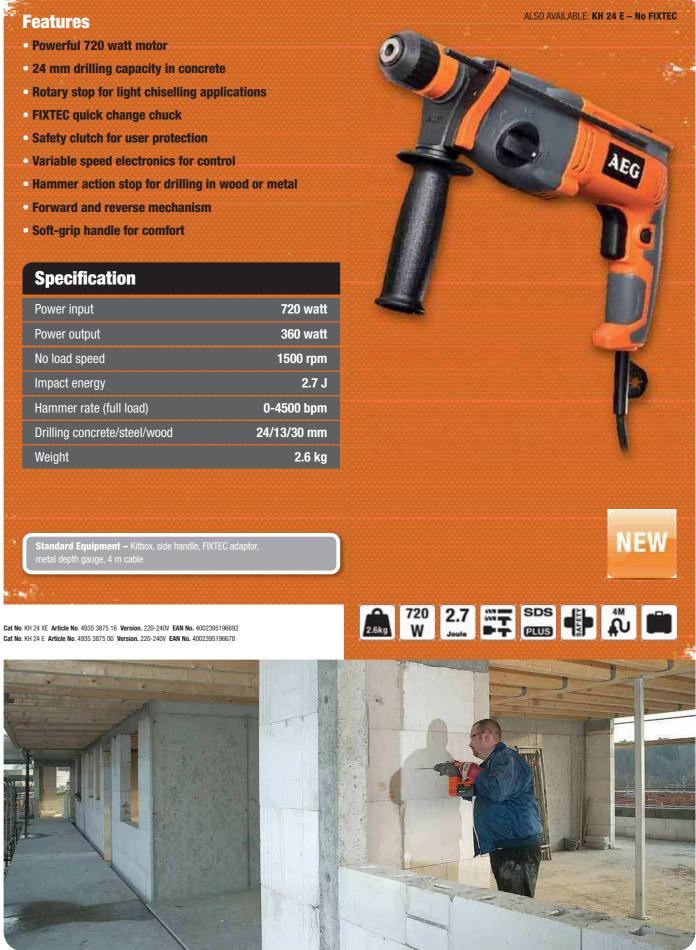

Model: KH 24 XE

SDS-PLUS COMBI HAMMER

Model: KH 26 E

Features

- Powerful 800 watt motor
- 26 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Safety clutch for user protection
- Variable speed electronics for control • Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort

Specification

Power input - 800 watt Power output - 400 watt No load speed - 1500 rpm Impact energy - 2.9 J Hammer rate (full load) - 4500 bpm Drilling concrete/ steel/wood - 26/13/30 mm Weight - 2.6 kg



SDS-PLUS COMBI HAMMER

Cat No. KH 26E Article No. 4935 3875 76 Version, 220-240V. EAN No. 4002395193073.

Features


- Powerful 1010 watt motor
- 28 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for control
- FIXTEC quick change tool system
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort


Specification

Power input - 1010 watt Power output - 505 watt No load speed - 1500 rpm Impact energy - 3.1 J Hammer rate (full load) - 5000 bpm

Drilling concrete/ steel/wood - 28/13/30 mm Weight - 2.8 kg

Idard Equipment – Kitbox, side handle, FIXTEC adaptor and



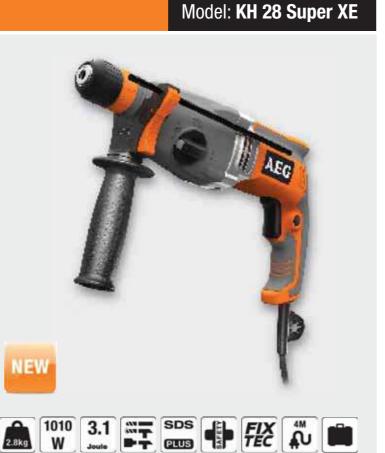

SDS-PLUS COMBI HAMMER

Features

- Powerful 750 watt motor
- 26 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for control in chiselling applications
- vibration for user comfort and safety

Specification Power input 750 watt Power output 375 watt No load speed 0-1200 rpm 3.2 J Impact energy 0-4500 bpm Hammer rate (full load) Drilling concrete/steel/wood 26/13/30 mm Drilling capacity core cutter 68 mm



Model: BH 26 LXE

ALSO AVAILABLE: BH 26 LE - No FIXTEC

SDS-PLUS COMBI HAMMER

Features

- Powerful 750 watt motor
- 30 mm drilling capacity in concrete
- Rotary stop for light chiselling applications Soft hammer mode reduces blow energy and speed for control in chiselling applications
- FIXTEC quick change tool system
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Hammer action stop for drilling in wood or metal

Specification

Power input - 750 watt Power output - 375 watt No load speed - 0-970 rpm Impact energy - 3.4 J Hammer rate (full load) - 0-4200 bpm

Drilling concrete/ steel/wood - 30/16/40 mm Drilling capacity core cutter - 82 mm Weight - 3.6 kg

> -3.6kg

750

W

tandard Equipment – Kitbox, side handle, FIXTEC adaptor and eyed chuck, metal depth gauge, 4 m cable

Cat No. PN 3500 X Article No. 4935 4122 10 Version. 220-240V EAN No. 4002395198337 Cat No. PN 3500 Article No. 4935 4121 52 Version. 220-240V EAN No. 4002395198306

SDS-PLUS CHIPPING HAMMER

Features

- Powerful 720 watt motor
- 4.1J impact energy for powerful chipping • Variolock (35 positions) for selecting the most
- appropriate chisel angle • Service hatches for easy changing of carbon brushes
- Lock-on switch function
- AVS anti-vibration aystem significantly reduces vibration for more comfortable operation
- Soft-grip for more comfortable handling

Specification

Power input - 720 watt Power output - 360 watt Impact energy - 4.1 J Hammer rate (full load) - 3650 bpm Weight - 3.7 kg

tandard Equipment – Kitbox, side handle, flat chisel, 4 m cable



4.1 ▶⊤

AVS

720 W

3.7kg



SDS-MAX COMBI HAMMER

Features

- Powerful 1200 watt motor
- 40 mm drilling capacity in concrete
- Rotary stop for chiselling applications
- Soft hammer mode reduces blow energy and speed for control in chiselling applications
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- · Service light provides in-time notice in the case of worn out brushes

Specification

Power input - 1200 watt Power output - 600 watt No load speed - 450 rpm Impact energy - 13 J Hammer rate (full load) - 2840 bpm Drilling concrete/core bit/ tunnel drill bit - 40/90/65 mm Drilling capacity core cutter - 82 mm Weight - 6.6 kg

Standard Equipment – Kitbox, side handle, grease, 6m cat

Cat No. KH 5E Article No. 4935 4123 26 Version. 110V EAN No. 4002395198603

SDS-MAX CHIPPING HAMMER

Features

- Powerful 1200 watt motor
- 13J impact energy for effortless chipping
- Soft hammer mode reduces blow energy and speed for control in chiselling applications
- · AVS anti-vibration system significantly reduces vibration for user comfort and safety
- · Soft start for precise start of chiselling
- · Service light provides in-time notice in the case of worn out brushes

Specification

Power input - 1200 watt Power output - 600 watt Impact energy - 13 J

Hammer rate (full load) - 2840 bpm Weight - 6.2 kg

ndard Equipment – Kitbox, D front handle, grease, 6m cable

Model: PN 3500X

ALSO AVAILABLE: PN 3500 No FIXTEC

Model: PM 3

Model: KH 5 E





Model: MH 5 E





SDS MAX LARGE COMBI HAMMER

Model: PN 11 E

Features

- Powerful 1700 watt motor
- 27J impact energy for heavy demolition applications
- 50mm drilling capacity into concrete
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort

Specification

Weight - 11.8 kg Drilling capacity concrete/core bit/ tunnel drill bit - 50/150/80mm

Standard Equipment – Kitbox, D front handle, additional straight handle, 6m cable

Cat No. PN 11E Article No. 4935 4124 40 Version. 220-240V EAN No. 4002395198931



SDS MAX LARGE DEMOLITION HAMMER

Model: PM 10 E

Features

- Powerful 1600 watt motor
- 27J impact energy for heavy demolition applications
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort

Specification

Power input - 1600 watt **Power output -** 800 watt **Impact energy -** 7-27 J Hammer rate (full load) - 975-1950 bpm Weight - 11 kg

Standard Equipment – Kitbox, D front handle, additional side handle, grease, 6m cable, pointed chisel



Cat No. PM 10E Article No. 4935 4124 18 Version. 220-240V EAN No. 4002395198832



PONER TO DRIL DEEPER

DRILLING SYSTEMS

AEG POWERTOOLS offer the power to drill deeper with its powerful range of percussion drills offering enhanced performance, reliability and durability for

todays professional user.

RANGE INCLUDES

PERCUSSION DRILLS

DIAMOND SYSTEM

SCREWDRIVERS



ALEG

PERCUSSION DRILL

Features

- Compact and powerful 570 watt motor
- Compact ergonomic design offers excellent handling
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13mm metal keyed chuck

Specification

Power input - 570 watt Power output - 285 watt No load speed - 0-2700 rpm Drilling concrete/steel/wood - 15/13/30 mm

Max torque - 23 Nm Chuck - 1.5-13 mm Weight - 1.7 kg

Standard Equipment – Side handle and metal depth ga

Cat No. SBE 570R Article No. 4935 4126 81 Version. 220-240V EAN No. 4002395199303

4*EG* 23 570 w T 4 1.7kg

Model: SBE 570 R

Model: SBE 630 R

PERCUSSION DRILL

Features

- Compact and powerful 630 watt motor
- Compact ergonomic design offers excellent handling
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13mm metal keyless chuck

Specification

Power input - 630 watt Power output - 315 watt No load speed - 0-2800 rpm Drilling concrete/steel/ wood - 15/13/30mm

Max torque - 23 Nm Chuck - 1.5-13 mm Weight - 1.7 kg

ndard Equipment – Kitbox, side handle and metal depth gauge

Cat No. SBE 630 R Article No. 4935 4172 99 Version. 220-240V EAN No. 4002395192571 Cat No. SB2 630 Article No. 4935 415037 Version. 220-240V EAN No. 4002395193042



23 630 1.7kg W

PERCUSSION DRILL

Features

- Compact and powerful 720 watt percussion drill
- IMB Integrated-Metal-Block technology for highest durability and stability
- 2-speed gearbox with synchromesh gear lever
- Patented FIXTEC system for quick and easy changing of accessories
- Variable speed control with forward and reverse mechanism
- · Easy access to carbon brushes via removal of soft-grip rubber
- Hammer action stop for rotary drilling
- 13mm metal keyless chuck

Specification

Power input - 720 watt Power output - 375 watt No load speed - 0-1200/0-3400 rpm Drilling concrete/steel wood - 20/40/13 mm

Max torque - 60 Nm Chuck - 1.5-13 mm Weight - 2.4 kg

Standard Equipment – Kitbox, side handle, metal depth g

Cat No. SB2E 720 RX Article No. 4935 4128 94 Version. 220-240V EAN No. 4002395192793

HIGH TORQUE PERCUSSION DRILL

Features

- Compact and powerful 750 watt high torque percussion drill
- 62 Nm torque delivers complete power
- IMB Integrated-Metal-Block technology for highest durability and stability
- · 2-speed gearbox with synchromesh gear lever
- Variable speed control with forward and reverse mechanism
- · Easy access to carbon brushes via removal of soft-grip rubber
- Hammer action stop for rotary drilling
- 13mm metal keyless chuck

Specification

Power input - 750 watt Power output - 375 watt No load speed - 0-1200/0-3400 rpm Drilling concrete/steel/ wood - 20/13/40 mm

Max torque - 62 Nm Chuck - 1.5-13 mm Weight - 2.4 kg

tandard Equipment – Kitbox, side handle, metal depth gauge,





Model: SB2E 720 RX



Model: SB2E 750 RX ST

ALSO AVAILABLE: SB2E 750 R ST - No FIXTEC



PERCUSSION DRILL

Features

- Compact and powerful 750 watt percussion drill
- AVS anti-vibration system for more comfortable use
- Safety clutch for user protection
- 2-speed gearbox for increased torque and versatility
- Ergonomic soft-grip design for comfort
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13mm metal keyless chuck

Specification

Power input - 750 watt Power output - 410 watt No load speed - 0-1000/0-3200 rpm Drilling concrete/steel/ wood - 20/13/40 mm

Max torque - 56 Nm Chuck - 1.5–13 mm Weight - 2.8 kg

nt – Kitbox. side handle. metal dept

NEW

750 W

56 Nm

2.8kg

NEW

2.9kg

Cat No. SB 20-2E Article No. 4935 4110 00 Version. 220-240V EAN No. 4002395196609 Cat No. SB 20-2E with keyed chuck Article No. 4935 4118 03 Version. 220-240V EAN No. 4002395132430

PERCUSSION DRILL

Features

- Compact and powerful 1010 watt percussion drill
- AVS anti-vibration system for more comfortable use
- Safety clutch for user protection
- 2-speed gearbox
- Ergonomic soft-grip design for comfort
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13mm metal keyless chuck

Specification

Power input - 1010 watt Power output - 570 watt No load speed - 0-1000/0-3200 rpm Drilling concrete/steel/ wood - 22/13/40 mm

Max torque - 60 Nm **Chuck -** 1.5–13 mm Weight - 2.9 kg

Cat No. SB 22 2E Article No. 4935 4110 30 Version. 220-240V EAN No. 4002395196630 Cat No. SB 22 2E with keyed chuck Article No. 4935 4118 06 Version. 220-240V EAN No. 4002395132447



Model: **SB 22 2E**

L-SHAPE PERCUSSION DRILL

Features

- Ultra compact powerful 750 watt percussion drill

- durability & stability
- mechanism
- of accessories
- length, improved visibility

Specification

Power input	750 watt
Power output	375 watt
No load speed	0 - 1200 / 0 - 3400 rpm
Drilling concrete/steel/wood	20/13/40 mm
Max torque	58 Nm
Chuck	1.5 - 13 mm
Weight	2.6 kg





Model: **SB 20 2E**

Model: ERGOMAX

DRY DIAMOND DRILL

Features

- Powerful 1500 watt motor
- High performance 2 speed dry diamond drill Dual protection with interlinked mechanical and electronic clutches for safety
- Robust construction and full metal gearbox for durability • 2-Speed gear box
- Electronics with soft start for precision drilling and motor overload protection
- Soft hammer mode

Specification

Power input - 1500 watt Power output - 820 watt No load speed - 0-1500/0-3000 rpm Spindle thread - M 18 x 2.5

Max. drilling capacity in masonry/brick - 162 mm Weight - 4.2 kg

Standard Equipment – Kitbox

Cat No. DB 1500-2 E Article No. 4935 4124 75 Version. 220-240V EAN No. 4002395198955



Model: DB 1500-2 E



Model: MFE 1500

WALL CHASER

Features

- Powerful 1500 watt motor
- Electronics with thermal overload protection and soft start
- Variable and adjustable cutting depth for accurate results
- Variable cutting width for versatility
- Bayonet adaptor for dust extraction
- Spindle lock

Specification

Power input - 1500 watt Power output - 745 watt Disc diameter - 125 mm

No load speed - 9500 rpm Cutting width/depth - 8-30/8-26 mm Weight - 4.1 kg

Standard Equipment – Kitbox, 4 m cable, special break out chis front handle, suction adaptor, spanner

Blade for MFE 1500

Туре	pe Blade Ø Bore Ø Segment height Quantity		ID No.	EAN Code		
	mm	mm			4932-	4002395
DSU-125 - Laser welded universal blade especially suitable for wall chasers	125	22.23	10	1	373147	346455





SELF DRILLING SCREWDRIVER

Features

- Powerful 720 watt motor for increased productivity
- · Compact self drilling screwdriver with high torque for self tapping screw • Full metal gearbox for durability
- · Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and Soft-grip for comfortable handling • 1/4" hex bit reception
- Belt clip

Specification

Power input - 720 watt Power output - 360 watt No load speed - 0-2500 rpm

Self-tapping/wood screws - 6.3/6 mm Bit reception - 1/4" Weight - 1.5 kg

Standard Equipment – 2 depth guages, 3/8" & 5/16" hex socket bit holder, PH2 bit, belt clip, 4 m cable

Cat No. S 2500E Article No. 4935 4132 25 Version. 220-240V EAN No. 4002395197651

DRYWALL SCREWDRIVER

Features

- Powerful 720 watt motor for increased productivity
- · Compact high speed screwdriver for drywall applications
- Full metal gearbox for durability
- · Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and Soft-grip for comfortable handling
- 1/4" hex bit reception
- Belt clip

Specification

Power input - 720 watt Power output - 360 watt No load speed - 0-4000 rpm

Drywall screws - 5 mm Bit reception - 1/4" Weight - 1.4 kg

ard Equipment – Depth guage, bit holder, PH2 bit, belt clip,

Model: **S 2500 E**



Model: **S 4000 E**



PONER TO DERFORM

METALWORKING SYSTEMS

AEG POWERTOOLS offer an extensive range of grinders in a wide variety of power classes for the most diverse professional applications. These high performance tools are equipped with advanced features to ensure comfort and ease of use in the most challenging environments.

RANGE INCLUDES

SMALL ANGLE GRINDERS

LARGE ANGLE GRINDERS

DIE GRINDERS

POLISHERS/SANDERS

ABRASIVE CHOPSAW



SMALL ANGLE GRINDER

Features

- Compact powerful 670 watt motor Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Protected air inlets
- Spindle lock

Specification

Power input - 670 watt Power output - 370 watt No load speed - 10,000 rpm Cutting depth - 28 mm

Grinding disc Ø - 115 mm Spindle thread - M 14 Weight - 1.9 kg

Cat No. WS 6-115 Article No. 4935 4132 50 Version. 220-240V EAN No. 4002395197699 Cat No. WS 6-100 Article No. 4935 3932 65 Version. 220-240V EAN No. 4002395197682

SMALL ANGLE GRINDER

Features

- Compact powerful 700 watt motor
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of
- work piece and optimised cutting depth Protected air inlets
- Spindle lock

Specification

Power input - 700 watt Power output - 385 watt No load speed - 10,000 rpm Cutting depth - 33 mm

Grinding disc Ø - 125 mm Spindle thread - M 14 Weight - 1.9 kg

Cat No. WS 6-125 Article No. 4935 4134 90 Version. 220-240V EAN No. 4002395198542







Model: WS 6-115

ALSO AVAILABLE: WS6-100 with 100mm disc and M10 spindle



Model: WS 6-125

SMALL ANGLE GRINDER

Features

- Compact powerful 750 watt motor
 Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility Flat metal gear head for excellent visibility of work
- piece and optimised cutting depth
- Optimised for left and right-hand usage
- New "snap-in" safety guard for keyless adjustment
- Spindle lock, with safety mechanism

Specification

Power input - 750 watt Power output - 410 watt No load speed - 10,000 rpm Cutting depth - 28 mm

Grinding disc Ø - 115 mm Spindle thread - M 14 . Weight - 1.8 kg

Cat No. WS 8-115 M Article No. 4935 4121 25 Version. 220-240V EAN No. 4002395198245

SMALL ANGLE GRINDER

Features

- Compact powerful 750 watt motor
 Metal gearbox for durability
- Gear head rotates at 90° intervals for added versatility
- FIXTEC patented nut for fast and easy disc changing • Optimised for left and right-hand usage
- New "snap-in" safety guard for keyless adjustment
- Spindle lock, with safety mechanism

Specification

Power input - 750 watt Power output - 410 watt No load speed - 10,000 rpm Cutting depth - 33 mm

Grinding disc Ø - 125 mm Spindle thread - M 14 Weight - 1.8 kg

Cat No. WS 8-125 M Article No. 4935 4121 00 Version. 220-240V EAN No. 4002395198214 Cat No. WS 8-125 MX Article No. 4935 4120 52 Version. 220-240V EAN No. 4002395198177

SMALL ANGLE GRINDER

Features

- Compact powerful 850 watt motor
- Metal gearbox for durability
- Gear head rotates at 90° intervals for added versatility
- FIXTEC patented nut for fast and easy disc changing
- · Digitronic with variable speed preselection, soft start, motor overload protection and no-load speed limitation
- New "snap-in" safety guard for keyless adjustment
- Optimised for left and right-hand usage
- Spindle lock, with safety mechanism

Specification

Power input - 850 Watt Power output - 495 Watt No Load Speed - 10,000 rpm Cutting Depth - 33mm

Grinding disc diameter - 125mm Spindle thread - M14 Weight - 1.8 kg

Model: WS 8-115 M



SMALL ANGLE GRINDER

Model: WS 1000-125

Features

- Powerful 1010 watt motor
- Metal gearbox for durability
- Gear head can be rotated at 90° intervals
- Flat metal gearhead for excellent visibility of work piece and optimised cutting depth
- New "snap-in" safety guard for keyless adjustment
- Spindle lock, with safety mechanism

Specification

Power input - 1010 watt Power output - 600 watt No load speed - 11,000 rpm Cutting depth - 33 mm Grinding disc Ø - 125 mm Spindle thread - M 14 Weight - 2.2 kg

Standard Equipment – 4 m cable, additional handle, flange nut, safety guard and spanner







Model: WS 1200-125

1200 | 125 mm I

W 🔊 🔊

4M

SMALL ANGLE GRINDER

Features

- Powerful 1200 watt motor
- Metal gearbox for durability
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- New "snap-in" safety guard for keyless adjustment
- Spindle lock, with safety mechanism

Specification

Power input - 1200 watt Power output - 720 watt No load speed - 11,000 rpm Cutting depth - 33 mm **Grinding disc Ø -** 125 mm **Spindle thread -** M 14 **Weight -** 2.4 kg

Standard Equipment – 4 m cable, additional handle, flange nut, safety guard and spanner



SMALL ANGLE GRINDER

Features

- Powerful 1450 watt motor
- Digitronic with constant speed electronics, soft start, motor overload protection and no-load seed limitation
- FIXTEC patented nut for fast and easy disc changing
 - Automatic cut-off, easy change carbon brushes
 Flat metal gear head for excellent visibility of work piece
 - Flat metal gear nead for excellent visibility of work pla and optimised cutting depth.
 - Epoxy coating field and armature combat abrasive dust to increase tool lifetime.
 - New "snap-in" safety guard for keyless adjustment
 - · Spindle lock, with safety mechanism
 - Large surface safety switch

Specification

Power input - 1450 watt Power output - 870 watt No load speed - 2600-11,000 rpm Cutting depth - 33 mm Grinding disc Ø - 125 mm Spindle thread - M 14 Weight - 2.5 kg

Standard Equipment – 4 m cable, additional handle, flange nut, safety guard

Cat No. WSC 14-125 MX Article No. 4935 4122 33 Version. 220-240V EAN No. 4002395198368

SMALL ANGLE GRINDER

Features

- Powerful 1450 watt motor
- Digitronic with variable speed preselection, soft start, motor overload protection and no-load seed limitation
- FIXTEC patented nut for fast and easy disc changing
- Automatic cut-off, easy change carbon brushes
- Flat metal gearhead for excellent visibility of work piece and optimised cutting depth.
- Epoxy coating field and armature combat abrasive dust to increase tool lifetime.
- New "snap-in" safety guard for keyless adjustment
- · Spindle lock, with safety mechanism
- Large surface safety switch

Specification

Power input - 1450 watt Power output - 870 watt No load speed - 2600-11,000 rpm Cutting depth - 33 mm Grinding disc Ø - 125 mm Spindle thread - M 14 Weight - 2.5 kg

Standard Equipment – 4 m cable, additional handle, FIXTEC nut, safety guard, flange nut, kitbox

Model: WSC 14-125 MX





Model: WSE 14-125 MX





LARGE ANGLE GRINDER

Features

- Powerful 2100 watt motor
- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch

Specification

Power input - 2100 watt Power output - 1350 watt No load speed - 8300 rpm Cutting depth - 43 mm

Grinding disc Ø - 180 mm Spindle thread - M 14 Weight - 4.7 kg

Cat No. WS 21-180 Article No. 4935 4114 90 Version. 220-240V EAN No. 4002395197033

LARGE ANGLE GRINDER

Features

Powerful 2100 watt motor

- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch

Specification

Power input - 2100 watt Power output - 1350 watt No load speed - 6300 rpm Cutting depth - 68 mm

Grinding disc Ø - 230 mm Spindle thread - M 14 Weight - 4.9 kg

Cat No. WS 21-230 Article No. 4935 4115 00 Version. 220-240V EAN No. 4002395197040

l handle, flange nut, safety g



Model: WS 21-230 GVX

ALSO AVAILABLE: WS 21-230 GVX DMS

LARGE ANGLE GRINDER

Features

- Powerful 2100 watt motor
- AVS: additional handle and motor housing for more comfort handling and less strain on body joints
- · Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- Rotating rear handle providing optimum comfort and versatility • FIXTEC nut for fast and easy disc changing
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch

Specification

Power input - 2100 watt Power output - 1350 watt No load speed - 6600 rpm Cutting depth - 68 mm

Grinding disc Ø - 230 mm Spindle thread - M 14 Weight - 5.1 kg

Cat No. WS 21-230 GVX Article No. 4935 4124 94 Version. 220-240V EAN No. 4002395198962 Cat No. WS 21-230 GVX DMS. Article No. 4935 4125 79. Version. 220-240V. FAN No. 4002395199068



handle, flange nut, safety g



Model: WS 21-180

Model: WS 21-230

LARGE ANGLE GRINDER

Features

- Powerful 2400 watt motor
- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch with soft start

Specification

Power input - 2400 watt Power output - 1500 watt No load speed - 6600 rpm Cutting Depth - 43 mm

Grinding disc Ø - 180 mm Spindle thread - M 14 Weight - 5.1 kg

t**andard Equipment –** 4 m cable, flange nut, safety guard

Cat No. WS 24-180 Article No. 4935 4125 83 Version. 220-240V FAN No. 4002395199075

LARGE ANGLE GRINDER

Features

- Powerful 2400 watt motor
- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch with soft start

Specification

Power input - 2400 watt Power output - 1500 watt No load speed - 6600 rpm Cutting Depth - 68 mm

Grinding disc Ø - 230 mm Spindle thread - M 14 Weight - 5.1 kg

pment – 4 m cable, flange nut, safety guar


Cat No. WS 24-230 Article No. 4935 4126 14 Version. 220-240V EAN No. 4002395199129 Cat No. WS 24-230 DMS Article No. 4935 4126 24 Version. 220-240V DMS EAN No. 4002395199181





I Equipment – 4 m cabl









Model: WS 24-180





Model: WS 24-230

ALSO AVAILABLE: WS 24-230 DMS





LARGE ANGLE GRINDER

Model: WS 24-230 GVX

ALSO AVAILABLE: WS 24-230 GVX DMS

Features

- Powerful 2400 watt motor
- AVS: additional handle and motor housing for more comfort handling and less strain on body joints
- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- Rotating rear handle providing optimum comfort and versatility
- FIXTEC nut for fast and easy disc changing
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch with soft start

Standard Equipment – 4 m cable, FIXTEC nut, anti vibration additional handle and safety guard

Cat No. WS 24-230 GVX Article No. 4935 4126 28 Version. 220-240V EAN No. 4002395199198 Cat No. WS 24-230 GVX DMS Article No. 4935 4126 33 Version. 220-240V DMS EAN No. 4002395199204



Specification

opeemedaten	
Power input	2400 watt
Power output	1500 watt
No load speed	6600 rpm
Cutting depth	68 mm
Grinding disc Ø	230 mm
Spindle thread	M 14
Weight	5.3 kg

DIE GRINDER

Features

- High speed, one handed die grinder
- Variable speed electronic
 Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1.3kg
- Ergonomic switch

Specification

Power input - 500 watt No load speed - 10,000 - 29,000 rpm Collet diameter - 6 mm Max. grinding wheel diameter - 40 mm (at 80 m/sec) Max. grinding pin diameter - 20 mm (at 45 m/sec) Weight - 1.3 kg

Standard Equipment – Key, 6 mm collet, 4 m cable

Cat No. GS 500 E Article No. 4935 4129 85 Version. 220-240V EAN No. 4002395192939

DIE GRINDER

Features

- Variable speed electronic
- Long spindle for easy access to awkward places
- Double bearing spindle seating for smooth rotation
- Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1.9kg
- Ergonomic switch

Specification

Power input - 600 watt No load speed - 10,000 - 29,000 rpm Collet diameter - 6 mm Max. grinding wheel diameter - 40 mm (at 80 m/sec) Max. grinding pin diameter - 20 mm (at 45 m/sec) Weight - 1.9 kg

Standard Equipment – Key, 6 mm collet, 4 m cable

Model: **GS 500 E**





Model: GSL 600 E





POLISHER

Model: **PE 150**

1200 1150 mm I W S

Model: SE 12-180

Features

- 1200 watt polisher
- Variable speed electronics for various materials and finishes
- Special gearing for high spindle torque and ideal polishing speed • Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch

Specification

Power input - 1200 watt Power output - 600 watt No load speed - 900 - 2500 rpm Grinding disc Ø - 150 mm Spindle thread - M 14 Weight - 2.1 kg

ndard Equipment – 4 m cable, additional handle, cap

Cat No. PE 150 Article No. 4935 4122 66 Version. 220-240V EAN No. 4002395198443

RIGHT ANGLE SANDER

Features

- 1200 watt sander with full wave electronics
- Variable speed electronics for various materials and finishing
- High motor torque and optimum speed range for sanding, especially for fine surface work
- Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch

Specification

Power input - 1200 watt Power output - 600 watt No load speed - 1800-4800 rpm Grinding disc Ø - 180 mm Spindle thread - M 14 Weight - 2.5 kg

ard Equipment – 4 m cable, additional handle with guard,






METAL CHOPSAW

Features

- Powerful 2300 watt motor

Power input	2300 watt
No load speed	3800 rpm
Cutting capacity round pipe 90°	/45º 115/115 mm mm
Cutting capacity rectangular profile	90° 110 x 120 mm
	45°95 x 120 mm
Cutting capacity L-shape profile	90° 125 x 125 mm
	45° 95 x 95 mm
Cutting capacity square profile	90°/45° 115/95 mm
Wheel diameter	355 mm
Bore diameter	25.4 mm
Weight	17 kg

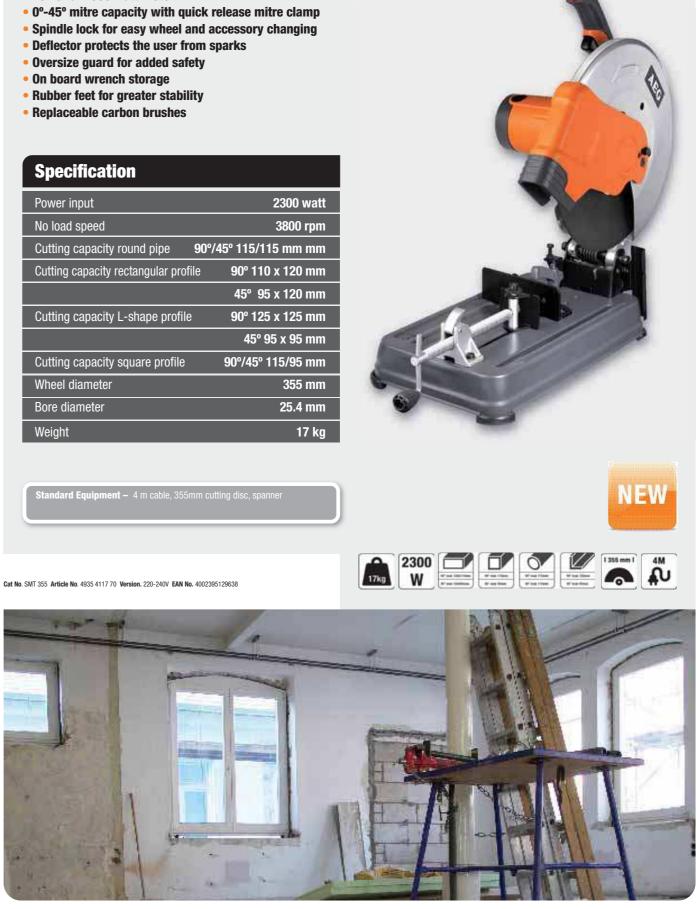

Model: **SMT 355**

PONER D SHAPE FUTURE

WOODWORKING SYSTEMS

AEG POWERTOOLS woodworking range offers a comprehensive selection of high performance machines to take on the most varied, professional applications. All of these tools offer ease of use, reliability and durability, and features to ensure professional efficiency and best results.

RANGE INCLUDES

JIGSAWS

CIRCULAR SAWS AND RECIPROCATING SAWS

RANDOM ORBIT AND BELT SANDERS

MITRE SAW AND LEGSTAND

DUST EXTRACTION

HEAT GUNS



AEG

TOPHANDLE JIGSAW

Model: STEP 90 X

Features

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4-Stage pendulum adjustment
- Variable speed electronics for control
- Ergonomic design with integrated soft-grip for comfortable handling
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- \bullet Base plate can be moved backwards for cutting close to edges and for precise mitre cuts to 45 $^\circ$

Specification

Power input - 600 watt Power output - 330 watt No load stoke rate - 1000-3200 rpm Mitre cutting angle to - 45° Stroke - 19 mm Pendulum settings - 4 Stages Max. cutting depth in wood/ steel/aluminium - 100/8/15 mm Weight - 2 kg

Standard Equipment – Kitbox, 4 m cable, blade, anti-splintering guard and dust cap

Cat No. STEP 90 X Article No. 4935 4129 10 Version. 220-240V EAN No. 4002395192816



Model: ST 800 XE

BODYGRIP JIGSAW

Features

- Powerful 705 watt motor
- Large 110mm cutting depth
- Patented FIXTEC system for changing saw blades in seconds
- 4–Stage pendulum adjustment
- Variable speed electronics for control
 AVS anti-vibration mechanism for user comfort
- Avs anti-vibration mechanism for user connort
 Ergonomic slimline bodygrip design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Base plate can be moved backwards for cutting close to edges

Specification

Power input - 705 watt Power output - 385 watt No load stoke rate - 600-2700 rpm Mitre cutting angle to - 45° Stroke - 26 mm Pendulum settings - 4 Stages Max. cutting depth in wood/ steel/aluminium - 110/10/25 mm Weight - 2.3kg

Standard Equipment – Kitbox, 4 m cable, blade, anti splintering guard and dust cap





TOPHANDLE JIGSAW

Features

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4–Stage pendulum adjustment
- Variable speed electronics for control
- AVS anti-vibration mechanism for user comfort
- Ergonomic top handle design with integrated soft-grip
- Sawdust blower keeps cutting line clear for accuracy
- \bullet Base plate can be moved backwards for sawing close to edges and for precise mitre cuts to 45°

Specification

Power input - 600 watt Power output - 300 watt No load stoke rate - 500-3000 rpm Mitre cutting angle to - 45° Stroke - 26 mm Pendulum settings - 4 Stages Max. cutting depth in wood/ steel/aluminium - 110/10/30 mm Weight - 2.5kg

Standard Equipment – Kitbox, 4 m cable, blade, anti splintering guard, dust cap and suction adaptor

Cat No. STEP 1200 BX Article No. 4935 4128 19 Version. 220-240V EAN No. 4002395192694

BODYGRIP JIGSAW

Features

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4-Stage pendulum adjustment
- Variable speed electronics for control
- · AVS anti-vibration mechanism for user comfort
- Ergonomic slimline body grip design with integrated Soft-grip
 Dust extraction port
- Sawdust blower keeps cutting line clear for accuracy
- Base plate can be moved backwards for cutting close to edges and for precise mitre cuts to 45°

Specification

Power input - 600 watt Power output - 300 watt No load stoke rate - 500-3000 rpm Mitre cutting angle to - 45° Stroke - 26 mm Pendulum settings - 4 Stages Max. cutting depth in wood/ steel/aluminium - 110/10/30 mm Weight - 2.5kg

Standard Equipment – Kitbox, 4 m cable, blade, anti splinterin guard, dust cap and suction adaptor

Model: STEP 1200 BX





Model: STEP 1200 X





165MM CIRCULAR SAW

Model: **KS 55 C**

Features

- Powerful 1200 watt motor
- 0-50° bevel capacity with 45° positive stop
- High strength composite shoe for durability
- Externally accessible brushes for easy replacement
- Integrated dust blower keeps cut line clear for accuracy
- Soft-grip handle for comfort

Specification

Power input - 1200 watt Power output - 611 watt No load speed - 6100 rpm Bevel - 0-50° Cutting depth 90/45/50° -54/45/38mm Saw blade/Arbor Ø - 165/30 mm Weight - 3.7 kg

Standard Equipment – Contractors bag, 4 m cable, parallel fence, 24 tooth TCT blade, spanner

Cat No. KS 55 C Article No. 4935 4118 30 Version. 220-240V EAN No. 4002395193141



1200 💓 🌠 🏝 🕼 🖴

Model: KS 66 C

NEW

185MM CIRCULAR SAW

Features

- Powerful 1600 watt motor for heavy duty applications
- 56° bevel capacity with 45° positive stop
- Magnesium upper and lower guard offers lightweight high strength
- Full length kerf indicator for accurate cutting
- Externally accessible brushes for easy replacement
- Integrated dust blower keeps cut line clear for accuracy
- Soft-grip handle for comfort

Specification

Power input - 1600 watt Power output - 765 watt No load speed - 5800 rpm Bevel - 56° **Cutting depth 90/45/56° -**61/49/35 mm **Saw blade/Arbor Ø -** 184/30 mm **Weight -** 4.8 kg

Standard Equipment – Contractors bag, 4 m cable, parallel fence, 24 tooth TCT blade, spanner





SLIDING COMPOUND MITRESAW

Features

- Powerful 1800 watt motor delivers 4400 rpm
- Large cutting capacities include a massive maximum crosscut of 343 mm x 111 mm at 90°
- Double bevel 0 47° left or right
- Mitres 60° left or right, perfect for awkward mitres
- Rugged cast construction with huge table area
- Cam operated mitre lock for fast angle adjustment

Specification

Power input	1800 watt
Blade diameter	305 x 30 mm
No load speed	4400 rpm
Mitre capacity (left/right)	60°
Depth of cut	111 mm
Crosscut capacity	343 mm
Weight	31 kg

tandard Equipment – 60 tooth 305mm blade

Cat No. PS 305 DG Article No. 4935 4115 70 Version. 220-240V EAN No. 4002395126002

UNIVERSAL MITRE SAW LEGSTAND

Features

- Extendable to 2.5 m
- Lightweight construction for portability
- 250 kg maximum load

Model: PS 305 DG





Model: **PSU 2500**



MINI RECIPROCATING SAW

Model: US 400 XE

Features

- Innovative design for confined spaces
- Extremely compact design
- Operational with one hand with exceptional balance 3500 strokes per minute and 13 mm stroke length for fast
- cutting applications • FIXTEC - for fast and easy keyless blade change
- Built-in LED
- 2-Finger variable speed trigger

Specification

Power input - 400 watt No load stroke rate - 0-3500 spm Length of stroke - 13 mm Weight - 1.8 kg



Cat No. US 400 XE Article No. 4935 4118 14 Version. 220-240V EAN No. 4002395193219

Standard Equipment – Kitbag, 4 m cable, 2 blades

RECIPROCATING SAW


Features

- Powerful 1300 watt motor
- FIXTEC blade clamp for fast and easy blade change • Variable speed switch for increased cutting control and efficiency
- Adjustable shoe for prolonged blade life
- Ergonomic soft-grip handle design for comfort
- Blades can be turned 180° for various applications

Specification

Power input - 1300 watt No load stoke rate - 0-2800 spm Length of stroke - 30 mm Weight - 3.8 kg

andard Equipment – Kitbox, 4 m cable, 2 blades







Model: US 1300 XE



free workpiece

RANDOM ORBIT SANDER

Variable speed for optimum control

Soft start and pad brake for a gouge

Convenient hook and loop paper fastening

• Dust extraction, with dust bag or absorption

Cat No. EX 125 E Article No. 4935 4131 95 Version. 220-240V EAN No. 4002395197590

RANDOM ORBIT SANDER

ndard Equipment – 4 m cable, 2 x 80 grit sanding dis

 Ergonomic, compact design • Through-body sealed slide switch for

reliability and ease of use

Features

free workpiece

system

and dust bad

system

Features

Diecast construction for strength and

andard Equipment - Kitbox, 4 m cable, 3 x 80 grit sanding pads,

CAT No. EX 150 E Article No. 4935 4132 00 Version. 220-240V EAN No. 4002395197606

DELTA SANDER

Features

- Variable speed electronics for various
- materials and finishes Integrated dust extraction
- Low weight
- Convenient hook and loop paper fastening
- Small, flexible design
- Dust extraction with dust bag or absorption system

Weight - 1.2 kg


tandard Equipment – flat sanding attachment, triangular sat aper set - 5 x grit 60, 5 x grit 120, 5 x grit 180, flat sand paper 5 x grit 60, 5 x grit 120, 5 x grit 180

Specification Power input - 440 watt No load speed - 4000-10,000 rpm Oscillation rate - 8000-20.000 rpm

Weight - 1.4 kg

- Oscillation diameter 3.2/6.4 mm Sanding disc size - 150 mm Weight - 2.8 kg
- Dust extraction, with dust bag or absorption
- durability

 Dual orbits for control of material removal • Variable speed for optimum control Soft start and pad brake for a gouge Through-body sealed slide switch for reliability and ease of use



Model: EX 125 E

Specification

Power input - 300 watt No load speed - 7000-12,000 rpm Oscillation rate - 14,000-24,000 rpm Oscillation diameter - 2.4 mm Sanding disc size - 125 mm





Model: **EX 150 E**





Model: DSE 260



Specification

Power input - 260 watt No load speed - 8000 - 12,900 rpm Oscillation Rate - 13,000 - 22,000 rpm Oscillation Diameter - 1.5 mm Sanding surface - 105 x 105 mm triangular

BELT SANDER

Features

- Powerful 1010 watt motor
- Electronic speed for control and optimum results
- Clamping lever for easy, tool free changing of sanding belt
- Externally accessible brushes for easy replacement
- Control wheel for precise adjustment of sanding belt
- Compact design, ideal for sanding close to edges
- Die-cast construction for high strength and durability
- Dust extraction, with dust bag or absorption system

Specification

Power input - 1010 watt Belt length - 533 mm Belt speed - 240 - 450 m/min Sanding surface - 75 x 145 mm Belt width - 75 mm Weight - 5.1 kg

Standard Equipment – Kitbox, 4 m cable, 1 x 80 grit sanding belt, dust bag, pommel handle





BELT SANDER

Features

- Powerful 1100 watt motor
- Extra-large sanding surface 100 x 140 mm
- Full-wave electronics with pre-selection of belt speed
- · Control wheel for precise adjustment of belt alignment
- Dust extraction, with dust bag or absorption system

Specification

Power input - 1100 watt Belt length - 560 mm Belt speed - 240 - 400 m/min Sanding surface - 100 x 140 mm Belt width - 100 mm Weight - 5 kg

andard Equipment – 4 m cable, 1 x 100 grit sanding belt



Features	Spec
 Powerful 2050 watt motor Electronic variable speed control Plunge depth set by calibrated dial Micro depth adjustment 3-stage depth stop lock Vertical depth adjustment scales 	Power in Collet ca Plunge c No-load Weight -
Standard Equipment – Kitbox, 4 m cable, 8mm parallel guide and 4 guide bushes	collet, spanner,
OF 2050 E Article No. 4935 4036 65 Version. 220-240V EAN No. 4002395	5125869
25L VAC	
	Spec Power in Air volur Max. vac Containe Suction Weight -
Features • CLEAR-PRESS filter cleaning system • 25 litre container capacity • Wet & Dry cleaning • Wet overfill protection • Click system - easy to change accessories	Power in Air volu Max. vac Containe Suction Weight - 2 x extension tub
Features • CLEAR-PRESS filter cleaning system • 25 litre container capacity • Wet & Dry cleaning • Wet overfill protection • Click system - easy to change accessories • Fleece double wall filter bag and disposal bag Standard Equipment – Tool adaptor, hand tube,	Power in Air volu Max. va Contain Suction Weight -

- CLEAR-PRESS filter cleaning system
- 30 litre container capacity
- PET filter cartridge · Automatic operation when used with
- powertools
- Dust class L for dust rated up to 1mg/m³
- Low noise fan for silent cleaning
- Wet & dry cleaning
- Fleece double wall filter bag and disposal bag

Standard Equipment – Tool adaptor, hand tube, 2 x extension tu floor nozzle, crevice nozzle, fleece filter bag, disposal bag, accesso



ty - ½ " city - 66 mm

Model: HBS 1000 E

Model: BBSE 1100

Model: **OF 2050 E**



max. - 2050 watt

ed - 10,000 – 23,000 rpm



Model: AP 250 ECP

cation

max. - 1400 watt 3600 L/min - 190 mbar pacity - 25 L diameter/length - 32 mm x 3.5 m



Model: AP 300 ELCP

cation

Weight - 10 kg


Power input max. - 1500 watt Air volume - 3700 L/min Max. vacuum - 250 mbar Container capacity - 30 L Suction hose diameter/length - 32 mm x 3.5 m





Standard Equipment – Flat jet nozzle, reflector nozzle, 12mm round jet nozzle, kitbox.



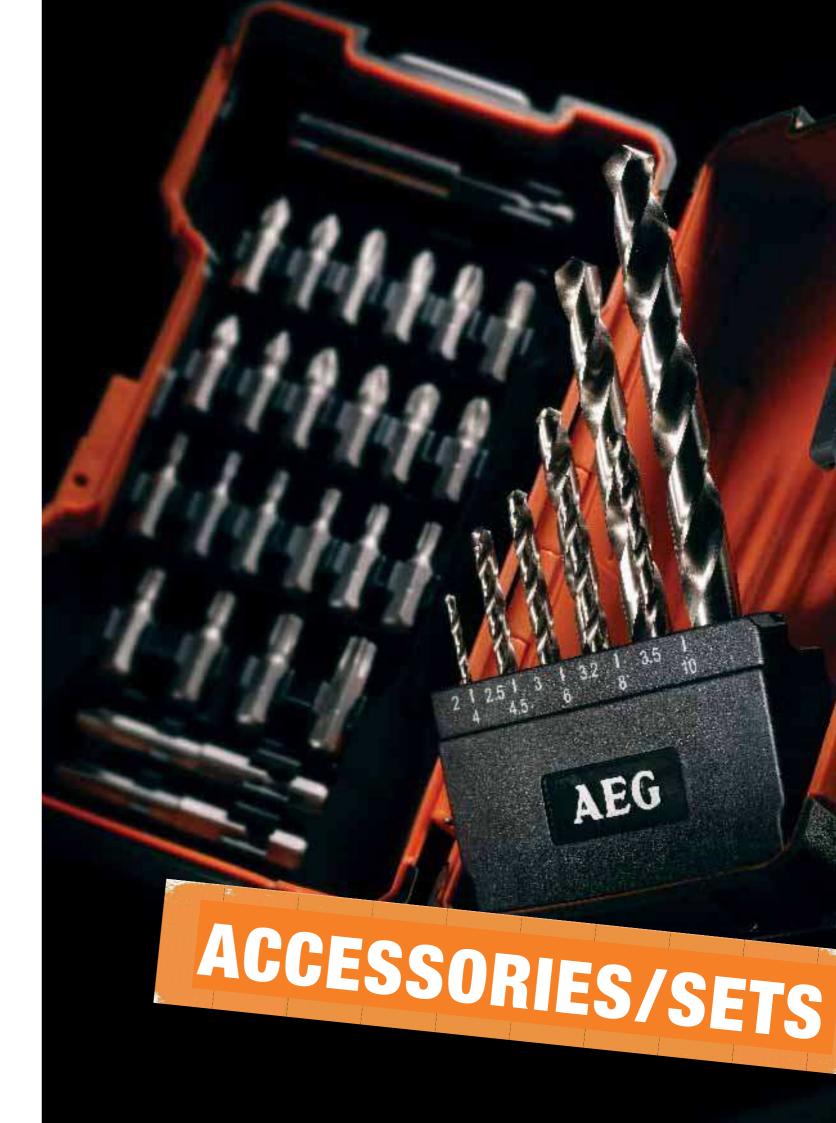


SDS-PLUS DRILL BITS - 2 CUT / 10 PIECE TRADE PACKS

Ø mm	A mm	B mm	Quantity	ld. No. 4932-	EAN Code 4002395	
5	110	50	10	352256	369157	
5.5	110	50	10	352257	369164	3
6	110	50	10	352258	369171	
6	160	100	10	352259	369188	
7	160	100	10	352260	369195	
8	110	50	10	352261	369201	
8	160	100	10	352262	369218	
8	210	150	10	352263	369225	A
10	160	100	10	352264	369232	
10	210	150	10	352265	369249	
10	260	200	10	352266	369256	
12	160	100	10	352267	369263	
12	210	150	10	352268	369270	
Set of 8 SDS-plus dr	ill bits					
with Ø 5 / 6 / 8 x 110 r	mm and Ø 6 (2 pcs) / 8 / 1	0 / 12 x 160 mm		352236	368952	
Set of 8 SDS-plus drives with \emptyset 5 / 5,5 (2 pcs) /	ill bits ′ 6 x 110 mm and Ø 7 / 8 /	10 / 12 x 160 mm		352237	368969	

High quality 2 cutter carbide tip with 130° tip angle. The carbide tip is set deeper into the head for a more precise fit and better durability. 2 flute geometry for rapid material removal. Surface treated flute eliminates binding for faster drilling and high abrasion resistance. Made in Germany.

SDS-PLUS CHISELS

Description	A mm	B mm	Quantity	ld. No. 4932-	EAN Code 4002395	
Point Chisel	200	-	1	352269	369287	
Flat Chisel	200	20	1	352270	369294	
Wide Chisel	200	30	1	352271	369300	
Set of 3 SDS-plu	s chisels with 1	pointed, 1 flat, 1	wide chisel	352272	369317	1



MASONRY DRILL BITS Carbide tip with diamond ground cutting edges with 130° angle - For drilling in brick and aerated concrete blocks

Ø mm	A mm	B mm	Quantity	ld. No. 4932-	EAN Code 4002395
4	75	40	1	363591	332410
5	85	50	1	363593	332434
5.5	85	50	1	363595	332458
6	100	60	1	363597	332472
6	150	85	1	367032	333967
7	100	60	1	363599	332496
8	120	80	1	363600	332502
8	200	135	1	363612	332366
10	120	80	1	363602	332526
10	200	135	1	363613	332373
12	150	85	1	363604	332540
Set of 10 Masonry dr with Ø 4 / 5 / 5.5 / 6 (2	ill bits : pcs) / 7 / 8 (2 pcs) / 9 / 10 m	352239	368983		

J	JIGSAW BLADES FOR WOOD / PLASTICS / METAL												
Blade Length (toothed) mm	Tooth pitch ^{mm}	Ref. No.	Quantity	ld. No. 4932-	EAN Code 4002395						METAL	Cu/Ni/Ms/Zn	ALU
(too	Too	Ret	Qui	ld. 49:	EAI 400	Application			DEPT	H OF CUT	(mm)		
MSI 4			EG										
75	3	T 111 C	5	352144	367979	Rough cutting	5 - 60	-	-	< 40	-	-	-
8521	6	AND	89988	B.									
50	1.35	T 101 A0	5	352145	367986	Fast, clean, curve cutting	< 20	-	< 20	< 15	-	-	-
5521 4	H	19093030	ABO	000000000	15								
75	4	T 244 D	5	352146	367993	Rough, curve cutting	< 60	-	-	-	-	-	-
3821 4	P	00000057	EC	409000									
75	4	T 144 D	5	352147	368006	Fast, rough cutting	< 60	-	-	-	-	-	-
3671 4	4	,	EG		1								
75	2.5	T 101 B	5	352148	368013	Very clean, splinter free cutting	< 30	< 60	-	< 30	-	-	-
3821 4	9		EG										
75	4	T 101 D	5	352149	368020	Fast, clean, splinter free cutting	< 60	< 60	-	< 45	-	-	-
882		AEC											
55	1.2	T 118 A	5	352150	368037	For thin sheet metal	-	-	-	-	1.5 – 4	1.5 – 4	-
882		AEG		6									
55	2	T 118 B	5	352151	368044	Rougher cuts in metal	-	-	-	-	3 – 6	3 – 6	3 – 10

Description

Set of 50 Jigsaw blades for wood 15 x 352147, 10 x 352145, 10 x 352148, 15 x 352149

Set of 50 Jigsaw blades for wood and metal 10 x 352147, 15 x 352150, 10 x 352148, 15 x 352151

SETS		
Description	ld. No. 4932-	EAN Code 4002395
Set of 19 HSS-R DIN 338 drill bits with Ø 2.0 / 2.5 (2pcs) / 3.0 (2pcs) / 3.5 (2pcs) / 4.0 (2pcs) / 4.5 (2pcs) / 5.0 (2pcs) 6.0 (2pcs) / 7.0 / 8.0 / 9.0 / 10.0	352241	369003
Set of 19 HSS-G DIN 338 drill bits with Ø 2.0 / 2.5 (2pcs) / 3.0 (2pcs) / 3.5 (2pcs) / 4.0 (2pcs) / 4.5 (2pcs) / 5.0 (2pcs) 6.0 (2pcs) / 7.0 / 8.0 / 9.0 / 10.0	352243	369027
Set of 19 HSS-G TITANIUM drill bits with Ø 2.0 / 2.5 (2pcs) / 3.0 (2pcs) / 3.5 (2pcs) / 4.0 (2pcs) / 4.5 (2pcs) 5.0 / (2pcs) / 6.0 (2pcs) / 7.0 / 8.0 / 9.0 / 10.0	352245	369041
Set of 8 Lip & Spur wood drill bits with Ø 3/4/5/6/7/8/9/10	352247	369065
Set of 35 Drilling & Screwdriving bits with 10 HSS-G drill bits Ø 2.0 / 2.5 / 3.0 / 3.2 / 3.5 / 4.0 / 4.5 / 6.0 / 8.0 / 10.0 20 Screwdriving bits 25 mm length (2 pcs each of) PH 1, PH 2, PH 3, PZ 1, PZ 2, PZ 3, TX 10, TX 15, TX 20, TX 25 10 Screwdriving bits (1 pc each of) TX 30 (25 mm), TX 40 (25 mm), PH 2 (50 mm), PZ 2 (50 mm) 1 Magnetic bit holder with 1/4" hex reception (60mm)	352249	369089
Set of 40 Drilling & Screwdriving bits 25 mm length 1 x PH 1 / 2 x PH 2 / 1 x PH 3 / 2 x PZ 1 / 2 x PZ 2 / 2 x PZ 3 / 1 x Hex SW3 / 1 x Hex SW4 / 1 x Hex SW5 / 1 x Hex SW6 / 1 x 0,6x4,5 / 1 x 0,8x5,5 / 1 x 1,0x5,5 / 1 x 1,2x6,5 / 1 x TX 6 / 1 x TX 7 / 1 x TX 8 / 1 x TX 9 / 2 x TX 10 / 2 x TX 15 / 2 x TX 20 / 2 x TX 25 / 1 x TX 30 / 1 x TX 40		
50 mm length 1 x PH 1 / 1 x PH 2 / 1 x PZ 1 / 1 x PZ 2 /1 x TX 10 / 1 x TX 15 / 1 x TX 20 Magnetic bit holder with 1/4" hex reception (60 mm)	352255	369140



ld. No. 4932-	EAN Code 4002395
352251	369102
352253	369126

INDEX

CORDLESS SYSTEMS	06 – 23	B1215R 12V
18V POWER	08 – 16	SL 3.6 3.6V
BSB 18 Li 18V Heavy Duty Hammerdrill/Driver	09	SM 3.6 3.6V
BS 18C Li 18V Ultra Compact Drill/Driver	10	SB 3.6 3.6V
BSS 18 Li 18V Compact Impact Driver	11	
BSS 18C Li 18V Ultra Compact Impact Driver	11	CHARGERS
BMS 18C Li 18V Ultra Compact Reciprocating Saw	12	AL 9618 18V
BUS 18 Li 18V Pendulum Action Reciprocating Saw	13	BL 9618 18V
BST 18X Li 18V Heavy Duty Jigsaw	14	LL 1230 12V
BHO 18 Li 18V Cordless Planer	14	LA 036 3.6V
BIG 10 LI 10V Condess Haller BKS 18 Li 18V Heavy Duty Circular Saw	14	
JP 18 A5 Contractor Pack – 18V 5 Piece Combo	15	HAMMER SYSTEMS
JF TO AS CUITIACIUL FACK - TOV S FIELE CUITIDU	10	
14.4V POWER	16 – 17	24V CORDLESS HAMMER
JP 14 Contractor Pack – 14.4V 3 Piece Heavy Duty Combo	10 - 17	BBH 24 NiMH 24V Cordless Hammer
BSB 14 STX Li 14.4V Hammerdrill/Driver	10	
BS 14X Li 14.4V Drill/Driver		ROTARY HAMMERS
BS 14 LI 14.4V Compact Impact Driver	17	BH 22 E SDS-PLUS Rotary Hammer
BSS 14 LI 14.4V Compact Impact Driver	17	BH 24 E SDS-PLUS Rotary Hammer
12V POWER	18 – 22	COMBI HAMMERS
BSB 12 NiCd 12v Hammerdrill/Driver	18	KH 24 X SDS-PLUS Combi Hammer
BS 12X NiCd 12V Drill/Driver	18	KH 26 E SDS-PLUS Combi Hammer
BSS 12 RW NICd Right Angled Impact Driver	19	KH 28 Super XE SDS-PLUS Combi Hamme
BS 12C2 Li 12V 2 Speed Ultra Compact Drill/Driver	21	BH 26 LXE SDS-PLUS Combi Hammer
BS 12C Li 12V Ultra Compact Drill/Driver	22	PN 3500X SDS-PLUS Combi Hammer
BSS 12C Li 12V Ultra Compact Drill/Driver	22	
·		KH 5 E SDS-MAX Combi Hammer
3.6V POWER	19	PN 11 E SDS-MAX Large Combi Hammer
SE 3.6 Li 3.6V Inline Screwdriver	19	CHIPPING HAMMERS
		PM 3 SDS-PLUS Chipping Hammer
SPECIALS	23	MH 5 E SDS-MAX Chipping Hammer
BR 18C Mini Radio	23	
BFL 18 18V Fluorescent Light	23	LARGE DEMOLITION HAMMERS
BATTERIES & CHARGERS	04 05	PM 10 E SDS-MAX Large Demolition Hamn
DAITENIES & UNANGENS	24 – 25	
BATTERIES	25	DRILLING SYSTEMS
L1830R 18V	25	PERCUSSION DRILLS
L1815R 18V	25	SBE 570 R Percussion Drill
B1820R 18V	25	SBE 630 R Percussion Drill
L1430R 14V	25	SB2E 720 RX Percussion Drill
M1430R 14V	25	SB2E 750 RX ST High Torque Percussion D
B1415R 14V	25	SB 20 2E Percussion Drill
B1420R 14V	25	SB 22 2E Percussion Drill
L1215R 12V	25	ERGOMAX L-Shape Percussion Drill
LL1230 12V	25	•
M1230R 12V	25	DIAMOND DRILLS

26 - 34 29 - 34 36 - 43 38 – 41

INDEX

STEP 1200 X Bodygrip Jigsaw

WALL CHASERS	42	CIRCULAR SAWS	60
MFE 1500 Wall Chaser	42	KS 55 C 165mm Circular Saw	60
		KS 66 C 185mm Circular Saw	60
SCREWDRIVERS	43		
S 2500 E Self Drilling Screwdriver	43	MITRE SAW	61
S 4000 E Drywall Screwdriver	43	PS 305 DG Sliding Compound Mitresaw	61
METALWORKING	44 - 55	MITRE SAW LEGSTAND	61
SMALL ANGLE GRINDERS	46 – 49	PSU 2500 Mitre Saw Legstand	61
WS 6-115 Small Angle Grinder	46		
WS 6-125 Small Angle Grinder	46	RECIPROCATING SAWS	62
WS 8-115 MX Small Angle Grinder	47	US 400 XE Mini Reciprocating Saw	62
WS 8-125 MX Small Angle Grinder	47	US 1300 XE Reciprocating Saw	62
WS 9-125 MX Small Angle Grinder	47		
WS 1000-125 Small Angle Grinder	48	RANDOM ORBIT & BELT SANDERS	63 - 64
WS 1200-125 Small Angle Grinder	48	EX 125 E Random Orbit Sander	63
WSC 14-125 MX Small Angle Grinder	49	EX 150 E Random Orbit Sander	63
WSE 14-125 MX Small Angle Grinder	49	DSE 260 Delta Sander	63
°		HBS 1000 E Belt Sander	64
LARGE ANGLE GRINDERS	50 - 52	BBSE 1100 Belt Sander	64
WS 21-180 Large Angle Grinder	50		
WS 21-230 Large Angle Grinder	50	ROUTER	65
WS 21-230 GVX Large Angle Grinder	50	OF 2050 E Router	65
WS 24-180 Large Angle Grinder	51		
WS 24-230 Large Angle Grinder	51	DUST EXTRACTION	65
WS 24-230 GVX Large Angle Grinder	52	AP 250 ECP 25L Vac	65
		AP 300 ELCP 30L Vac	65
DIE GRINDERS	53	HEAT GUNS	66
GS 500 E Die Grinder	53	PT 560 Heat Gun	66
GSL 600 E Die Grinder	53	PT 600 EC Heat Gun	66
POLISHERS	54	ACCESSORIES	67 - 69
PE 150 Polisher	54	AUCOSUMES	07 - 05
		ACCESSORY SETS	68 - 69
SANDERS	54	SDS-PLUS DRILL BITS – 2 Cut / 10 Piece Trade Packs	68
SE 12-180 Right Angle Sander	54	SDS-PLUS CHISELS	68
ABRASIVE CHOPSAW	55	MASONRY DRILL BITS JIGSAW BLADES FOR WOOD / PLASTICS / METAL	68 69
SMT 355 Metal Chopsaw	55	SETS	69
WOODWORKING	56 - 66		
JIGSAWS	58 – 59		
STEP 90 X Tophandle Jigsaw	58		
ST 800 X Bodygrip Jigsaw	58		
STEP 1200 BX Tophandle Jigsaw	59		
STEP 1200 X Bodyarin Liasaw	50		

INDEX 71

AEG POWERTOOLS

CORDLESS/HAMMERS/DRILLING METALWORKING/WOODWORKING ACCESSORIES

AEG POWERTOOLS promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

www.aeg-powertools.com

AEG POWER TOOLS – P.O. Box 320, D-71361, Winnenden, Germany Tel.: +49 71 95 12-0, Fax: +49 71 95 12-666

A&M Middle East – P.O Box 61254, Jebel Ali Free Zone South, Dubai, UAE Tel: +97148861399, Fax: +97148861400



© AEG POWERTOOLS

AEG POWERTOOLS reserve the right to change all data including images, specifications and service and warrantly information without notice. AEG POWERTOOLS will hold no liability for printing errors or mistakes.