


M SEAL Data Sheet

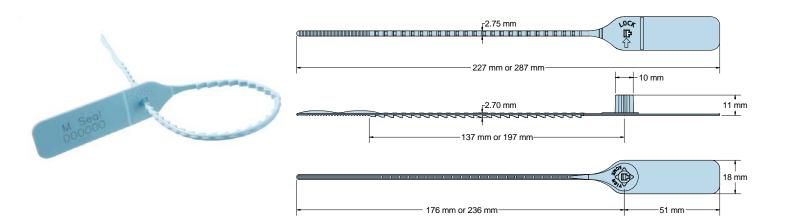

The Acme **M Seal** is a pull tight seal manufactured from Polypropylene material. The locking action is very similar to the tried and tested Minitight but has the contours of the smooth X Seal. The design offers a cost effective solution for applications where strength is not the primary requirement, but is ideal for use as an indicative seal.

Technical Data

Recommended Applications

Airlines, Refineries, Warehouses, Cash bags, Postbags, Mailrooms, Bar boxes, Fire doors, Lockers.

Material Polypropylene

roppiopjiene

Available Operating Length

(L1) 17.6cm (overall 23cm)(L2) 23.6cm (overall 29cm)

Strap Width 2.75mm

Average Breaking Strength 15kg

Marking

Laser, Foil or Thermo Transfer Consecutively numbered as standard Optional Customer name/logo Optional Laser or Thermo Transfer Barcoding

Colours

Foil marked: red, blue, green, yellow, orange, black, white. Laser or Foil marked: pastel shades of pink, blue, green, yellow, peach, also black and white. Thermo Transfer: all of the above Other colours may be available on request.

Packaging

| Standard Packaging | : 10 per mat and 1,000 seals/carton |
|--------------------|-------------------------------------|
| Carton Dimensions | : (L1) - 28cm x 20cm x 24cm |
| | : (L2) - 32cm x 20cm x 24cm |
| Carton weight | : (L1) - 2.55kg/carton |
| | : (L2) - 2.85kg/carton |
| | |